


engineering specifications

Model HD-9022



Active Elements 26
Boom Length 78.5"
Turning Radius 58.5"
Maximum Width 15" **Net. Weight** 3.21 lbs.
Vertical Height 25.5" **Shpg. Weight** 6 lbs.
Element Diameter 3/8" **Carton Dimensions** 6.25"x6.25"x89"

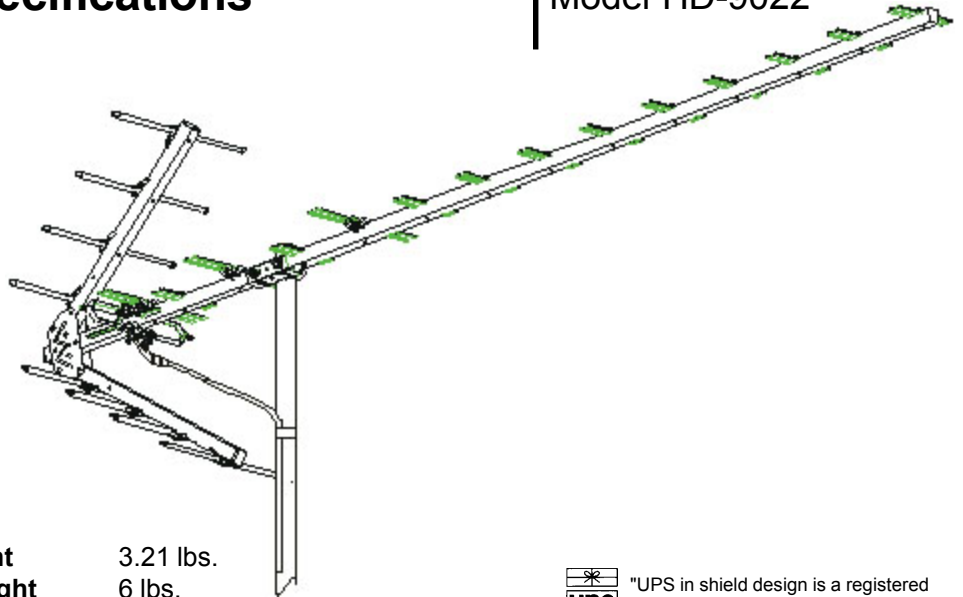

"UPS in shield design is a registered trademark of United Parcel Service of America, Inc. used by permission."

Output Impedance: 300 ohm / 75 ohm with included transformer
Recommended Preamp: AP Series

Made in U.S.A.

CHANNEL	CH.14	CH.32	CH.50	CH.69
dB gain over reference dipole	14.3	15.2	14.6	9.9
beamwidth at half power points	54°	43°	34°	23°
front-to-back ratio	13.5dB	16dB	18dB	13dB

POLAR PATTERNS

