

# WINEGARD®

## Pipe Mount Kit

### Model DS-3000

**WARNING**  
**INSTALLATION OF ANTENNAS NEAR POWER LINES IS DANGEROUS.**  
**FOR YOUR SAFETY, FOLLOW THE INSTALLATION INSTRUCTIONS.**

#### INSTRUCTIONS

**NOTE:** This mount is designed to fit on the side of a house. Either end of the mast can be attached to the base, depending on how much clearance is required for the antenna.

**NOTE:** Lag bolts not supplied.


**NOTE:** Not recommended for antennas with a boom length longer than 40".

**STEP 1.** Locate a stud in the area to be installed.


**STEP 2.** Drill a small pilot hole, to help start threading the lag bolts (5/16 x 3" recommended).

**STEP 3.** Apply silicone sealant to back of the base to seal holes.

**STEP 4.** Using lag bolts tighten the base to the wall. Make sure mast is plumb.

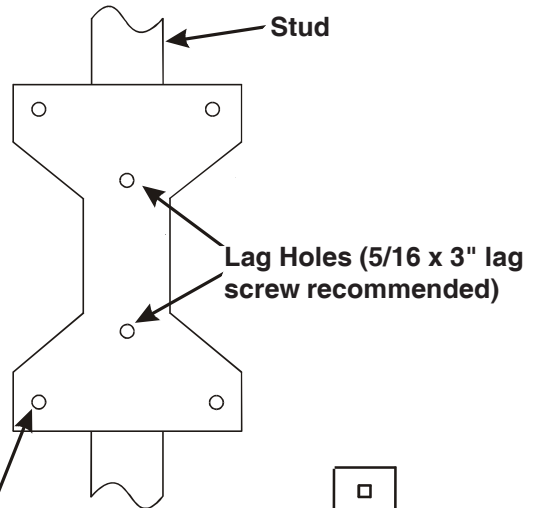

If siding is heavy enough these holes can also be used to help secure the base.

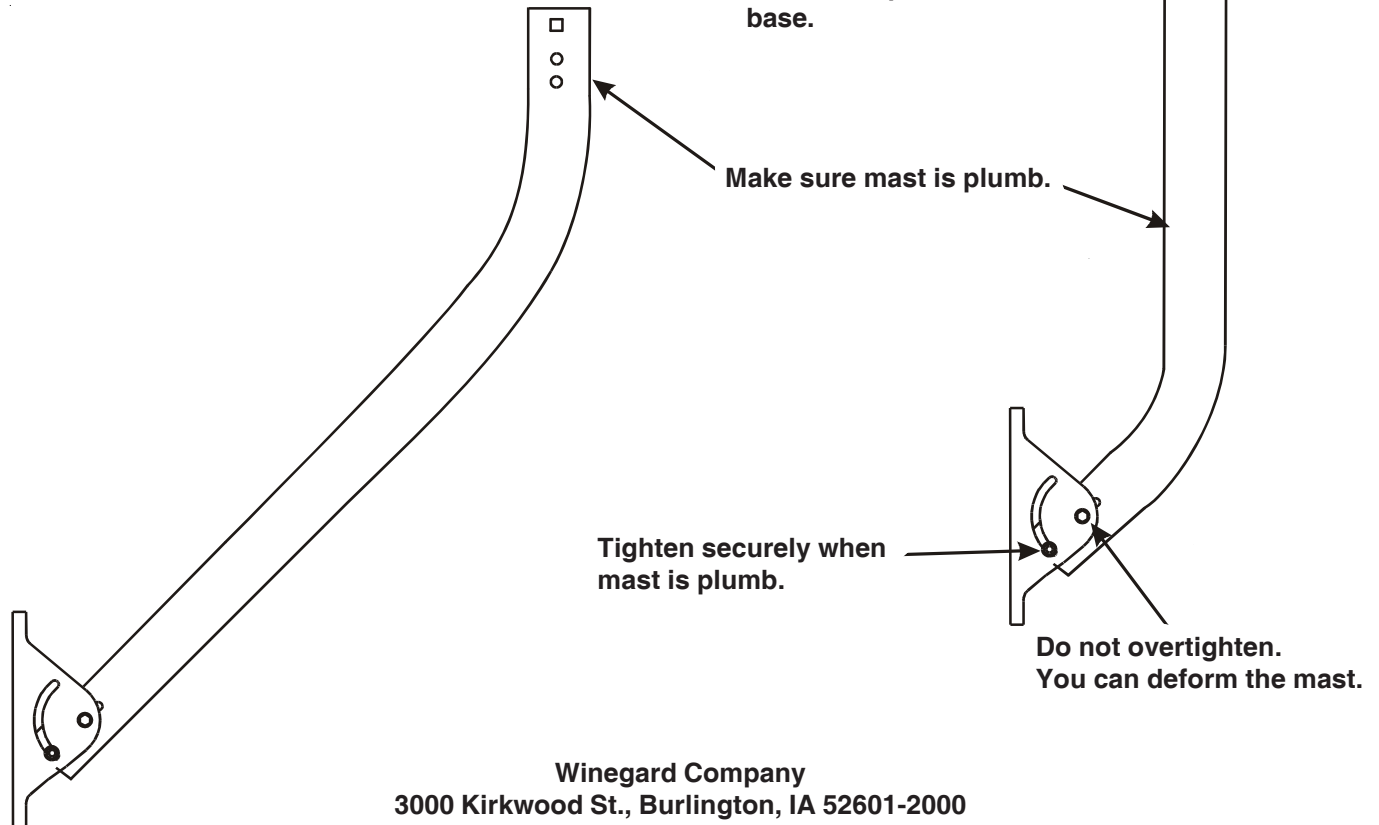

Winegard Company  
3000 Kirkwood St., Burlington, IA 52601-2000

Printed in U.S.A. © Winegard Company 1998

## 90 DAY LIMITED WARRANTY

Winegard Company warrants this Winegard product against any defects in materials or workmanship within 90 (ninety) days from date of purchase. No warranty claim will be honored unless at the time the claim is made, you present proof of purchase to an authorized Winegard dealer (if unknown, please contact Winegard Company, 3000 Kirkwood Street, Burlington, IA 52601-2000, Telephone 800-288-8094).

Winegard Company (at its option) will either repair or replace the defective product at no charge to you. This warranty covers parts, but does not cover any costs incurred in removal, shipping or reinstallation of the product. This limited warranty does not apply if the product is damaged, deteriorates, malfunctions or fails from: misuse, improper installation, abuse, neglect, accident, tampering, modification of the product as originally manufactured by Winegard, usage not in accordance with product instructions or acts of nature such as damage caused by wind, lightning, ice or corrosive environments such as salt spray and acid rain.

The 90 Day Warranty is provided on the condition that the equipment is properly delivered with all handling and freight charges prepaid to your Winegard dealer for return to our factory for repair or replacement. Winegard dealers will arrange for the replacement or repair and return to you without charge the product which failed due to defective material or workmanship.

WINEGARD COMPANY WILL NOT ASSUME ANY LIABILITIES FOR ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, MADE BY ANY OTHER PERSON.

ALL OTHER WARRANTIES WHETHER EXPRESS, IMPLIED OR STATUTORY INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE 90-DAY PERIOD OF THIS WARRANTY.

The foregoing shall be the sole and exclusive remedy of any person, whether in contract, tort or otherwise, and Winegard shall not be liable for incidental or consequential damage or commercial loss, or from any other loss or damage except as set forth above.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Rev. 2/08

## HOW TO PROVIDE LIGHTNING PROTECTION FOR TV ANTENNA AND SET

**STEP 1.** Mount the lightning arrestor as close as possible to where the downlead enters the house.

**STEP 2.** The ground wires for both the mast and the downlead should be copper or aluminum wire, number eight (8) or larger.

**STEP 3.** The downlead wire from the antenna to the lightning arrestor should be secured every four (4) to six (6) feet to prevent whipping.

**NOTE:** In the case of a "ground up" antenna installation, it may not be necessary to ground the mast if the mast extends four or more feet into the ground. Consult a TV serviceman for proper depth in your location.

